

THIS IS THE ONE

COLORADO™ 1

CONTROL FEATURES

- 3, 4 or 9-channel DMX-512 LED wash light (with ID addressing)
- Operating modes
 - 3-channel: RGB control
 - 4-channel: RGB, dimmer
 - 9-channel: RGB, ID, dim, macro, strobe, automatic, custom, vector
- Blackout/static/dimmer/strobe/pulse
- RGB color mixing with or without DMX controller
- Built-in automated programs via master/slave, DMX or COLOR-CON
- Recall custom programs via master/slave or DMX
- Vector speed channel for RGB color mixing

ADDITIONAL FEATURES

- Available in black or silver
- High-power, 1W (350mA) LEDs
- Ingress Protection: IP66
- Additional power output: max 30 units @ 120V (see manual for details)
- LED display with password protection
- Gel frame holder (4mm max thickness)
- Transfer custom programs between fixtures
- Double-bracket yoke doubles as floor stand

OPTIONS


- COLORado Controller (COLOR-CON)
- Optical systems: 15° (installed), 30° (CL20X30)
- 16.4ft (5m) power extension cable (IP5POWER)
- 16.4ft (5m) signal extension cable (IP5SIG)

SPECIFICATIONS

- 15° optics
- Beam angle: 13°
- Field angle: 27°
- Lux: 2,965.63 @ 2 m
- Light source: 36 1 W (12 x 350 mA red, 12 x 350 mA green, 12 x 350 mA blue) LEDs, 50,000 hrs
- Power and current: 120 V, 60 Hz; 48.6 W, 0.5 A (operating), 0.4 A (inrush)
- AC power: Auto-ranging 100 V ~ 240 V 50/60 Hz
- Power cable with plug: 65 in (1,651 mm)
- IP66 power extension cable: 103 in (2,604 mm)
- IP66 signal extension cable: 103 in (2,604 mm)
- DMX input cable: 6.5 in (165 mm)
- DMX output cable: 6.5 in (165 mm)
- Weight: 9.5 lbs / 4.3 kg
- Size: 7.9 x 9.5 x 9.6 in / 200 x 243 x 244 mm



*Gel Frame Included

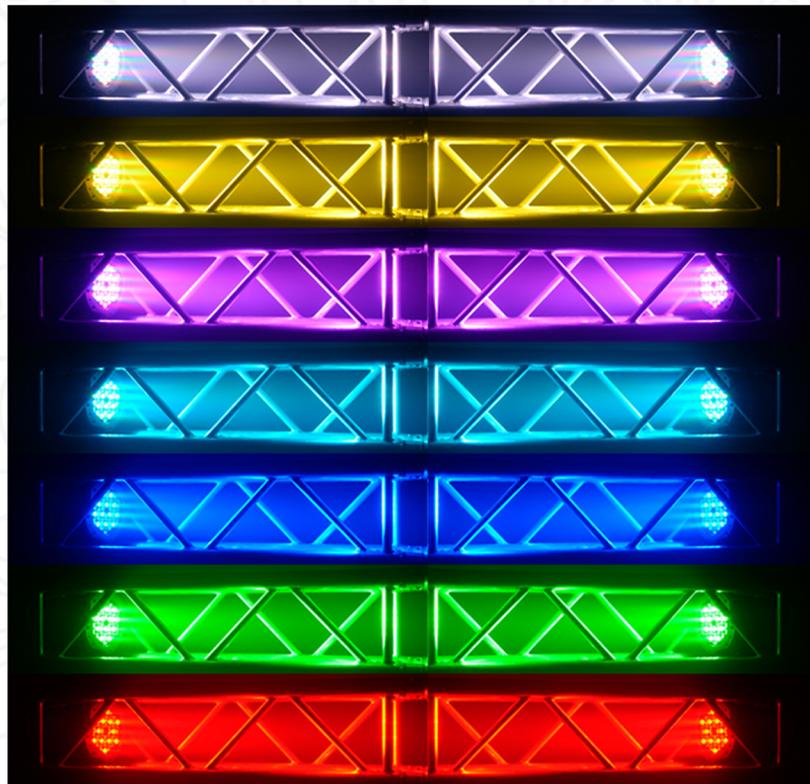

CHAUVET
Value - Innovation - Performance

www.chauvetlighting.com
sales@chauvetlighting.com
Phone: 954.929.1115