


COLORado™ Batten 72 Tour SPECIFICATIONS & FEATURES

CHAUVET®

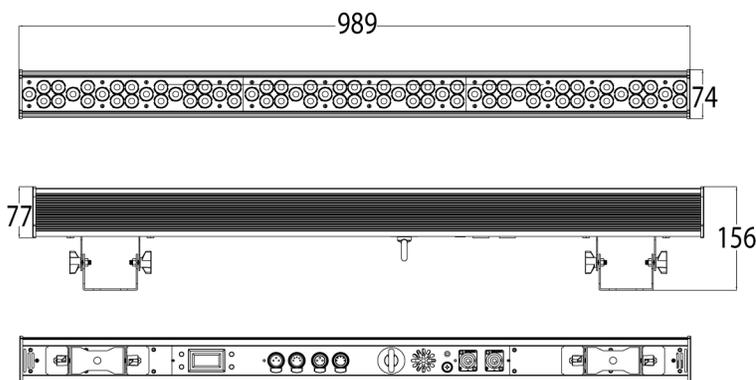

AT A GLANCE:

RGBWA Color Mixing



Key Features:

- RGBWA Color Mixing
- PowerCon™ Connectors
- Direct 3 & 5-Pin DMX Connections
- 5 Distinct Dimming Curves
- Color temperature presets

About this light:

The COLORado™ Batten 72 Tour is a 3, 4, 5, 6, 7, 9, 13 or 15-channel LED linear wash. The luminaire features RGBWA color mixing from 72 1 W red, green, blue, white and amber LEDs.

Perfectly suited for touring or installation the COLORado™ Batten 72 Tour is the direct result of listening to customers wants and needs.

The COLORado™ Batten 72 Tour features PowerCon™ connectors for power in and out as well as direct 3 and 5 pin DMX connections. The linear fixture is broken into controllable sections or controllable as a whole. Also added are white and amber LEDs for more vibrant colors and more precise color temperature. 5 selectable dimming curves were added to mimic those of conventional lighting sources and insure consistent fade out cues. Like all COLORado™ fixtures, the COLORado™ Batten 72 Tour is also flicker free and safe for video use.

DETAILED SPECIFICATIONS:

CONTROL FEATURES

- 3, 4, 5, 6, 7, 9, 13, or 15-channel RGBWA LED linear wash light
- Operating modes
 - 3-channel: RGB control
 - 3-channel: HSV control (hue, saturation and value)
 - 4-channel: RGB, dimmer
 - 5-channel: RGBWA control
 - 6-channel: RGBWA, dimmer
 - 7-channel: RGBWA, strobe
 - 9-channel: RGB for individual block control
 - 13-channel: RGBWA, ID addressing, dimmer, dimmer speed, strobe, macro, auto/custom, module select
 - 15-channel: RGBWA for individual block control
- Built-in automated programs via DMX
- Recall custom programs via DMX
- RGBWA color mixing with or without DMX control

ADDITIONAL FEATURES

- 5 distinct dimming curves
- Additional power output: max 13 units @ 120 V
- LED display with lock-out feature
- PowerCon™ connector
- 3-pin and 5-pin DMX input and output connectors
- Adjustable feet double as hanging bracket

SPECIFICATIONS

- Installed optics: 30°
 - Beam angle: 40.1°
 - Field angle: 54.8°
 - Lux: 1,300 @ 2 m
- Light source: 72 x 1 W LEDs, 50,000 hrs (18 x 350 mA red, 18 x 350 mA green, 18 x 350 mA blue, 9 x 350 mA white, 9 x 350 mA amber)
- Power and current: 120 V, 60 Hz; 72 W, 1.067 A (operating), 0.4 A (inrush)
230 V, 50 Hz; 71 W, 0.568 A (operating), 0.8 A (inrush)
- AC power: Auto-ranging 100 V ~ 240 V 50/60 Hz
- Power input cable: 60 in (1,524 mm)
- Weight: 9.8 lbs / 4.4 kg
- Size: 2.9 x 38.9 x 6.1 in / 74 x 989 x 156 mm

OPTIONS

- Optical systems: 15° (CL20x15), 25 x 6° (CL25x6)

www.chauvetlighting.com

info@chauvetlighting.com

t: 954.929.1115

3000 North 29th Court

Hollywood, FL 33020

