

DETAILED SPECIFICATIONS:

CONTROL FEATURES

- 3, 4, 9, or 12-channel indoor/outdoor RGB LED bank system
- Operating modes
 - 3-channel: RGB control
 - 4-channel: RGB, dimmer
 - 9-channel: RGB, ID addressing, dimmer, macro, strobe, auto/custom, DMX modes
 - 9-channel: RGB of 3 separate sections
 - 12-channel: RGB, CMY, ID addressing, dimmer, macro, strobe, auto/custom, DMX modes
- Individual pod control
- Pre-programmed color macros for each section
- RGB color mixing with or without DMX control
- Built-in automated programs via DMX or COLOR-CON

ADDITIONAL FEATURES


- Ingress Protection: IP66
- Interlock multiple units to create blinder, wall, or strip light effects
- Additional power output: max 8 units @ 120 V
- LCD display with password protection

SPECIFICATIONS

- Installed optics: 15° Optional optics: 30°
- Beam angle: 13° Beam angle: 29.5°
- Field angle: 26° Field angle: 55.4°
- Lux: 10,661 @ 2 m Lux: 2,394 @ 2 m
- Light source: 108 x 1 W LEDs 50,000 hrs
(36 x 350 mA red, 36 x 350 mA green, 36 x 350 mA blue)
- Power and current: 120 V, 60 Hz; 175.8 W, 1.2 A (operating), 2.6 A (inrush)
230 V, 50 Hz; 177.3 W, 0.78 A (operating), 0.24 A (inrush)
- AC power: Auto-ranging 100 V ~ 240 V 50/60 Hz
- Power cable with plug: 65 in (1,651 mm)
- IP66 power extension cable: 103 in (2,604 mm)
- IP66 signal extension cable: 103 in (2,604 mm)
- DMX input cable: 6.5 in (165 mm)
- DMX output cable: 6.5 in (165 mm)
- Data in: 22 in (559 mm)
- Data out: 18 in (470 mm)
- Power in: 21.5 in (546 mm)
- Power out: 20 in (508 mm)
- Weight: 28.7 lbs / 13.3 kg
- Size: 7.5 x 22.4 x 8.7 in / 190 x 570 x 220 mm

OPTIONS

- COLORado Controller (COLOR-CON)
- Optical systems: 30° (CLEN3036)
- 16.4 ft (5 m) power extension cable (IP5POWER)
- 16.4 ft (5 m) signal extension cable (IP5SIG)

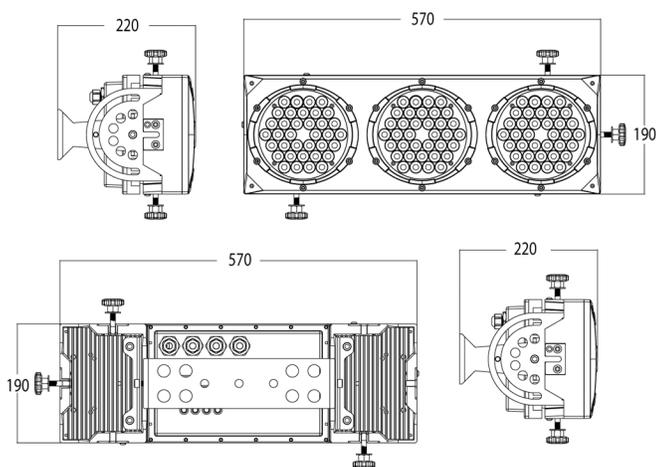

AT A GLANCE:

RGB Color Mixing



Key Features:

- RGB Color Mixing
- IP66 Outdoor Rated
- Individual Pod Control
- LCD Display With Password Protection
- RGB Color Mixing With or Without DMX

About this light:

The COLORado™ 6P is a 3, 4, 9 or 12-channel LED bank light. The luminaire features RGB color mixing from 108 1 W red, green and blue LEDs.

Perfectly suited for touring or installation the COLORado™ 6P is IP66 rated and is perfectly at home in the harshest of environments. Each pod is individually controllable depending on the mode selected. The fixture features auto-ranging power to allow for easy hook-ups. Like all COLORado™ fixtures, the COLORado™ 6P is also flicker free and safe for video use.